




KVG

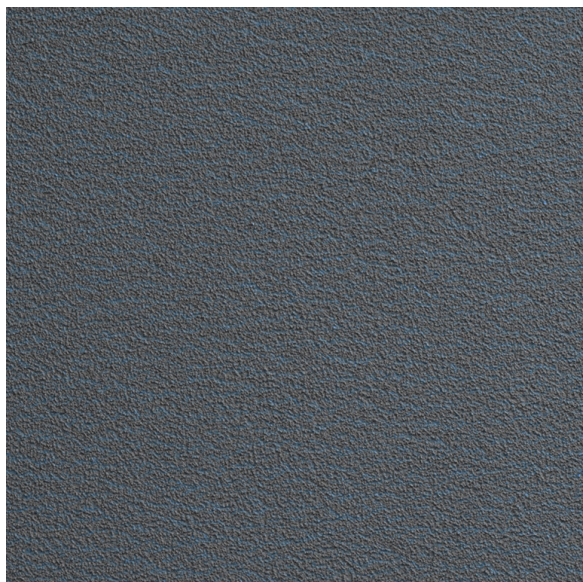

COLOR	Grey
BACKING	Polyester Film
GRAIN	Aluminum Oxide
COATING	Open
BONDING TYPE	Resin
TOP COAT	Special stearate
PRODUCTION WIDTH	1650mm

FORMS AVAILABLE



WORKING PROCESSES



PRODUCTIVE SECTORS



GRIT RANGE from P60 to P2000

24	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500+F
----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	--------

PRODUCT APPLICATIONS

Best use:

Composite Industry: carbon fibers, polyurethanes, poliesters, acrylic resins

Automotive: putty, primer and clear coats sanding

Marine: Gel Coat surfaces

Wood Industry: sanding of raw woods, polyester paints, acrylic and poly-acrylic solvent-based paints